

COMMON PROBLEMS


Protection from steam and moisture damage is especially important in bathrooms, where expensive tile finishes, vanities and fittings could be at risk. Noise control is often desirable, depending on location.

RECOMMENDATIONS: GIB AQUALINE® WET AREA & GIB NOISE CONTROL® SYSTEMS

Combination of GIB Aqualine® Wet Area System and GIB Noise Control® System. Make sure you include a waterproof membrane behind the tiles in the splash areas and shower, and a heated towel rail and extractor fan to help minimise moisture build up.

BATHROOM/ENSUITE RECOMMENDATIONS

- 1 GIB Aqualine® on the 'wet' side of the wall and two layers of 10mm GIB Noiseline® on the other
- 2 13mm GIB Aqualine® on the ceilings
- 3 Ceramic Tiling over GIB Aqualine® with waterproof membrane where required
- 4 Safe Heating
- 5 Water Resistant Paint/wallpaper
- 6 Acoustic Insulation eg. Pink® Batts®
- 7 Vented Windows
- 8 Extractor fan
- 9 Safety glass
- 10 Heated Towel Rail

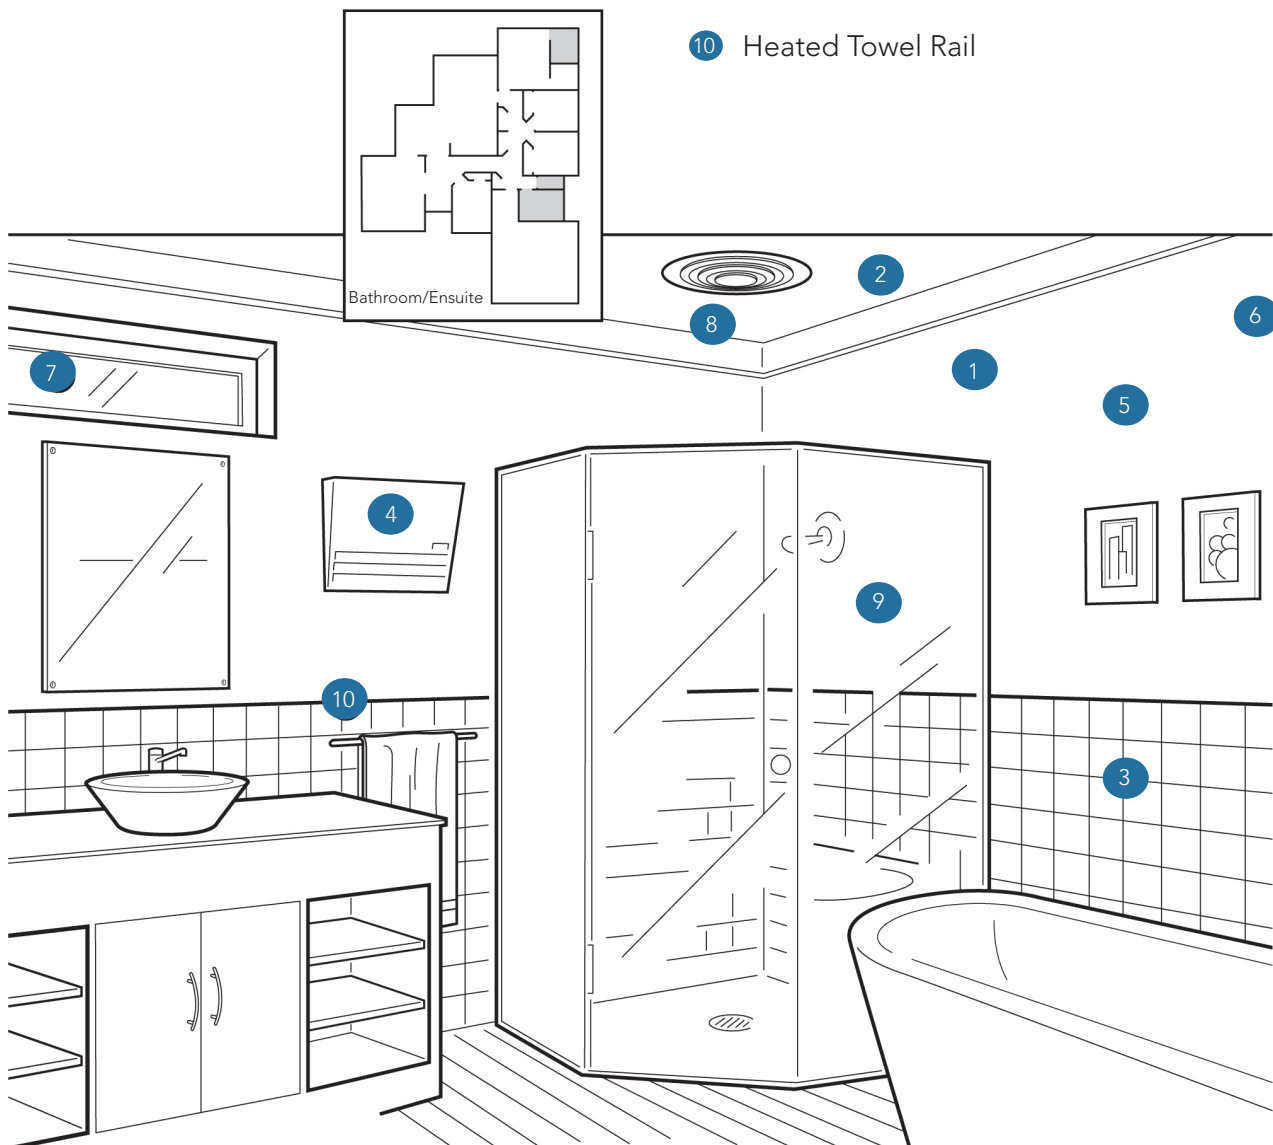



BATHROOM/ENSUITE SPECIFICATION CHECKLIST

Specify what you would like in this room

ITEM	RECOMMENDATION	
GIB Aqualine® Wet Area Systems		
Wall Linings	One layer of 10mm GIB Aqualine® one side of the wall	<input type="checkbox"/>
Ceiling Linings	One layer 13mm GIB Aqualine®	<input type="checkbox"/>
Wall Linings - if Ceramic Tiles on Walls	10mm GIB Aqualine® for tiles up to 20kg/m2	<input type="checkbox"/>
	13mm GIB Aqualine® for tiles up to 32kg/m2	<input type="checkbox"/>
Ceramic Tiles on walls	Waterproof membrane under tiles in shower/splash areas	<input type="checkbox"/>
Heating Source	Wall mounted bathroom fan heater	<input type="checkbox"/>
Wall Topcoat	Water resistant low sheen paint	<input type="checkbox"/>
Ceiling Paint Topcoat	Water resistant low sheen paint	<input type="checkbox"/>
Window Joinery	Vented with condensation drains	<input type="checkbox"/>
Extractor fan	Vented to outside exhaust fan	<input type="checkbox"/>
Floor Surface	Moisture resistant flooring substrate	<input type="checkbox"/>
Emergency drain	In floor	<input type="checkbox"/>

GIB Noise Control® Systems		
Wall Linings	Two layers 10mm GIB Noiseline® on the other side of the wall	<input type="checkbox"/>
Insulation – all walls	Pink® Batts®	<input type="checkbox"/>
Noise Control Floor/Ceiling	GIB Noise Control® System - Floor/Ceiling	<input type="checkbox"/>
Acoustic Sealant	To seal all gaps and penetrations - GIB Soundseal®	<input type="checkbox"/>
Door	Solid Core Door	<input type="checkbox"/>
Door Seals	Acoustic Seals around door perimeter & floor seal on base of door	<input type="checkbox"/>
Glazing	Acoustic Glass Windows	<input type="checkbox"/>
Plumbing	Place on external walls away from quiet areas	<input type="checkbox"/>
Penetrations	No downlights. Power points/light switches in adjacent stud bays.	<input type="checkbox"/>
	Not back to back	<input type="checkbox"/>

Other things to include USE THIS SPACE TO LIST ADDITIONAL ITEMS YOU REQUIRE IN YOUR BATHROOM

Thermosafe heated towel rail	
Toilet	
Shower/Bath	
Vanity	
Switches, Sockets and Accessories	

Features

Wall to ceiling feature:	<input type="text"/>	Wall to floor feature:	<input type="text"/>
Wall to door/window feature:	<input type="text"/>	Wall to wall feature:	<input type="text"/>
Other wall/ceiling features:	<input type="text"/>	Ceiling height:	<input type="text"/>